



Taraflex[®]
Sports Flooring
Where champions play

Gerflor[®]

REVEAL YOUR CREATIVITY

TURN YOUR DESIGN INTO REALITY

REVEAL YOUR TALENT

THE BEST FLOOR FOR EVERY PLAYER TO SHINE




UNIQUE DESIGNS




Personalise your sports floor using the digital printing process

- **Choose from collection**
choose one of our designs from our catalogue (examples shown below)
- **Change colour**
recolour the standard design of your choice
- **Customise**
create your own design



NATURE LAND

Return to basics and simplicity with natural designs




RETRONAUTE

A modern atmosphere with distinct character



FUN

An explosion of colours and designs



URBAN

Factory style with bold colours and simple designs

Available with all Taraflex floors
More designs available, visit our website: mytaraflex.gerflor.com
Minimum Order Quantity : 240m² / special price / each request subject to individual study*



Create your own logo thanks to water-jet cutting technology*




* For more information, please contact your local sales representative

COMPLETE SOLUTIONS

Each zone of your sports hall has its own constraints and requirements. Gerflor has solutions for each one of them, from floor to walls and finishing accessories.



Changing Rooms
Safety flooring /
Wall protection

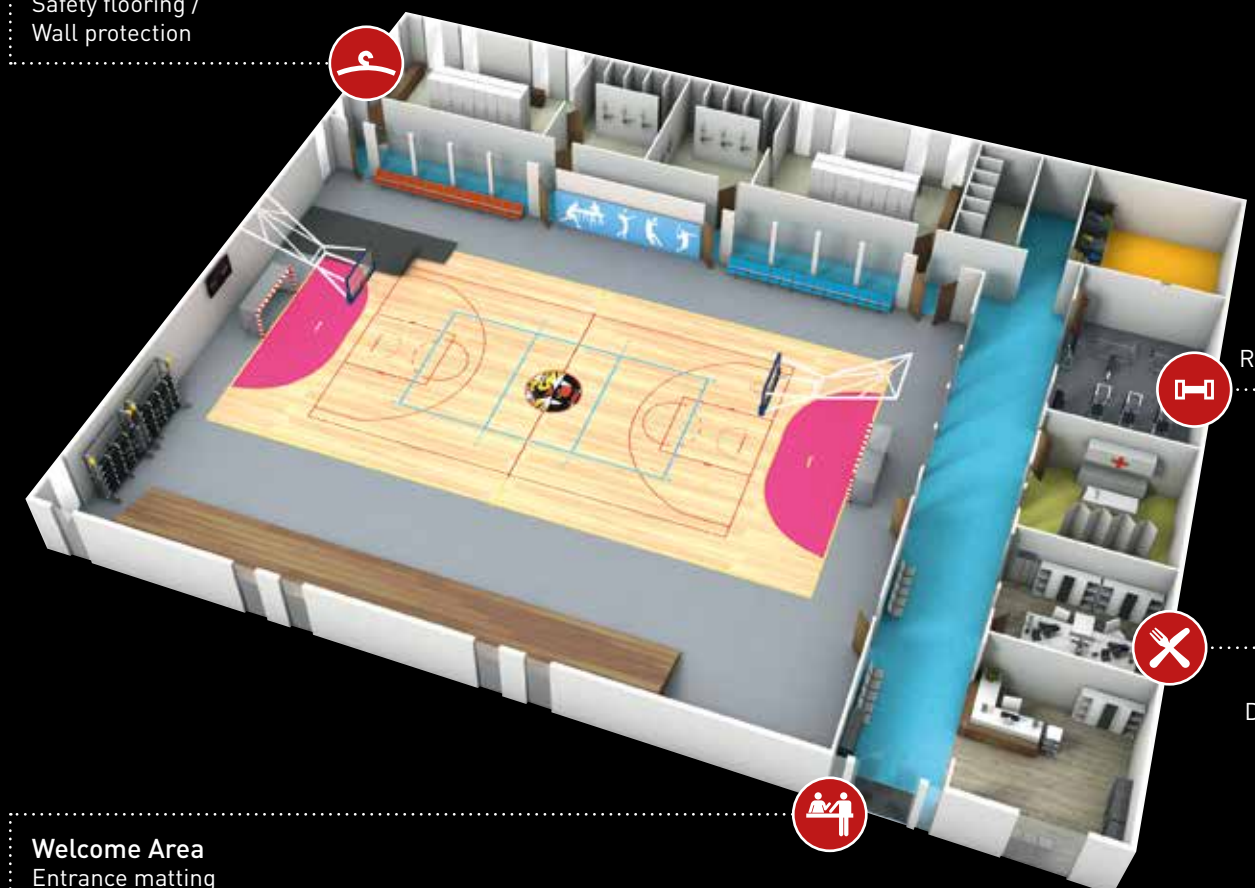

Fitness Area
Rubber flooring

Restaurant
Decorative tiles
and planks

Welcome Area
Entrance matting




DEDICATED SPORTS

Racket sports



TARAFLEX® TABLE TENNIS

Permanent solution




Portable solution




TARAFLEX® BADMINTON

Permanent solution



Portable solution





MULTI PURPOSE

Sport & Non-Sport Activities



TARAFLEX® MULTI-USE

Very high resistance to loads

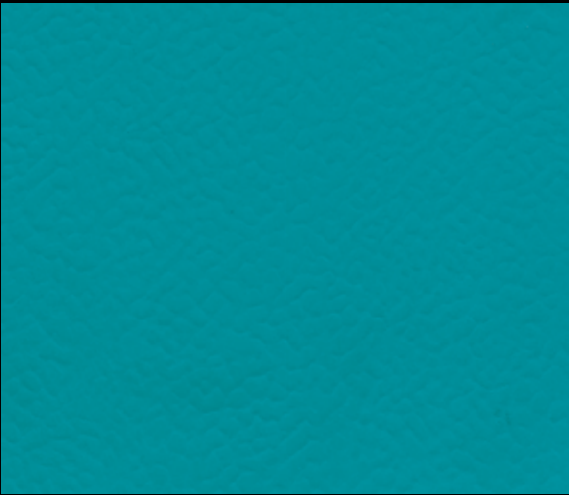


TARAFLEX® SURFACE

Compact surface, to be used alone or on sub-construction*



*MEETS EN 14904 WITH SUB-CONSTRUCTION

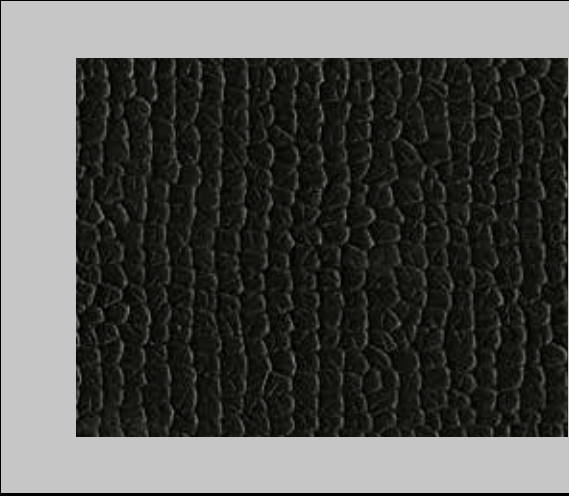

TARAFLEX® BATECO

Removable protective layer
Customized length on request.



MULTI SPORT

Education, Club & Competition



TARAFLEX®
EVOLUTION

SINCE
1976

The reference in sports
flooring

P1



7.5 mm



Also available in
Taraflex® Evolution SL

ALSO AVAILABLE WITH
Dry-Tex™



TARAFLEX®
PERFORMANCE

Best balance of sport
performance and safety

P2



9 mm



Also available in
Taraflex® Performance SL

ALSO AVAILABLE WITH
Dry-Tex™



TARAFLEX®
COMFORT

Maximum protection & safety

P3



12.5 mm



P1, P2, P3 : point elastic sports flooring classification according to EN 14904


COLOURS AND DESIGNS

TARAFLEX® SURFACE
TARAFLEX® EVOLUTION

TARAFLEX® PERFORMANCE
TARAFLEX® COMFORT



5763 - Maple Sun / Y = 40.2



6873 - Anthracite / Y = 20.5



6830 - Black / Y = 3.1



6557 - Forest / Y = 10.9




6430 - Blue / Y = 8.0




5742 - Wood Oak / Y = 27.8



6347 - Beige / Y = 39.7



3764 - Taupe / Y = 17.9



6758 - Silver Gray / Y = 32.6



6350 - Light Cherry / Y = 43.3



2404 - London Light Blue / Y = 33.8




6559 - Spring / Y = 47.1



6570 - Mint Green / Y = 16.6



6211 - Gold / Y = 41.5



6159 - Pink / Y = 19.1



6180 - Red / Y = 9.8




6445 - Lagoon / Y = 24.9



6038 - Terracotta / Y = 19.9



6431 - Teal / Y = 19.2



6146 - Coral / Y = 27.8

FIVB
OFFICIAL SUPPLIER

TARAFLEX® MULTI-USE



6844 - Black Strips / Y = 14.5



6391 - Maple Stone / Y = 30.6



6373 - Maple Ocean / Y = 21.1



6390 - Maple Lava / Y = 9.7



6392 - Maple Earth / Y = 10.2



6379 - Maple Desert / Y = 23.2



6350 - Light Cherry Design / Y = 43.3



5742 Wood Oak / Y = 27.8



2790 - Polished Concrete Dark Grey / Y = 15.3



2791 - Polished Concrete Light Grey / Y = 27.4



6180 - Red / Y = 9.8



6557 - Forest / Y = 10.9



6430 - Blue / Y = 8.0



6758 - Silver Gray / Y = 32.6

TARAFLEX® PROJECTS



Taraflex® Evolution



Taraflex® Multi-Use



Y1000316

RC Lyon B 726 580 152 - jpe - Photo credit S. Pillaud - 06/2023 - Y1000316 - Indicative documentation cost: 12 €

we care / we act Our Commitments for a Sustainable future



CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025



BIOSOURCED CONTENT**
10 % by 2025



RECYCLED CONTENT
30 % by 2025



ADHESIVE FREE***
35 % by 2025



ANNUAL VOLUME RECYCLED
60 000 t by 2025



* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution

	CARACTERÍSTICAS DEL PRODUCTO			
	Estándar	Requisito	Unidad	Resultados
DESCRIPCIÓN DEL PRODUCTO				
Tratamiento de superficies	-	-	-	Triple-Action ProtecSol®
Complejo de superficie	-	-	-	D-Max™
Espuma	-	-	-	CXP-HD+™
Espesor	EN ISO 24346	-	mm	6.2
Peso	EN ISO 23997	-	kg/m ²	4.2
Longitud	EN ISO 24341	-	lm	26.5 max
Anchura	EN ISO 24341	-	lm	1.5
PROPIEDADES DEPORTIVAS				
Absorción de impactos	EN 14808	≥ 25	%	P1
Deformación vertical	EN 14809	≤ 3.5	mm	≤ 2
Coeficiente de deslizamiento	EN 13036-4	80 to 110	-	80 - 110
Rebote de la pelota	EN 12235	≥ 90	%	≥ 90
CARACTERÍSTICAS TÉCNICAS				
Resistencia a la abrasión	EN ISO 5470-1	≤ 1000	mg	≤ 350
Resistencia a los golpes	EN 1517	≥ 8	N/m	≥ 8
Resistencia a la indentación	EN 1516	≤ 0.5	mm	≤ 0.5
CLASIFICACIÓN				
Fuego	EN 13501-1	-	-	Cfl-s1
Actividad antibacteriana (E. coli - S. aureus - MRSA) (1)	ISO 22196	-	-	> 99% inhibits growth
DECLARACIÓN DE PRESTACIONES				
	DOP-005-1011-A	-	-	Fuego Absorción de impactos Coeficiente de deslizamiento Resistencia a la abrasión Resistencia a la carga de rodadura

(1) La aplicación de un método de limpieza eficaz es la mejor defensa contra la infección